

NEO M14

13W LED Downlight Module


Classic Series

Proven. Quality. Customisable

The NEO M14 Architectural Downlight is used in Australia's most prestigious projects. Its versatility is sought after by designers and electricians alike. Available with the flexibility of 3 beam angles and a range of compatible mount rings in black and white.

Complete package in one box; LED Module, Dimmable Driver, Plug and Lead. Fully compliant with Australian Standards. Just add a mount ring of your choice to complete the kit.

Verified by Techlume Australia on 15/05/2023



IP44



SPECIFICATIONS

Material Specifications


Material	Aluminium, with Tempered Glass Cover
Dimensions	78mm (H) x 62mm (Dia)
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	18W Dimtronic Constant Current Driver, Leading Edge or Trailing Edge Dimmable 350mA
Dimming	Phase, Leading Edge or Trailing Edge
Connection Method	Complete with Australian Approved 2-Pin Plug and lead
Thermal Testing	Compliant with CA90 Classification
Australian Standards	Approved with RCM

Optic Specifications

LED Wattage	13W Citizen LED COB, with Reflector
Delivered Lumens	1441lm - 1587lm
CRI	83Ra
Beam Angle	60° / 36° / 22°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 55,000 Hrs
Calculated L70 (Hours)	70,000 Hrs

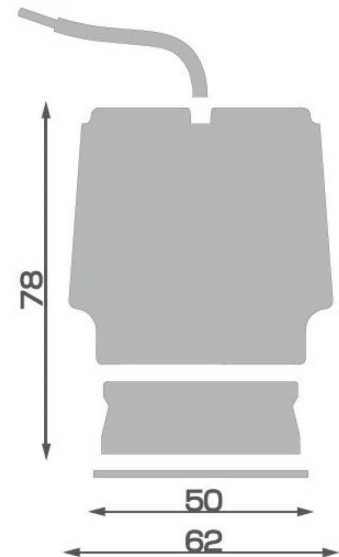

VARIATIONS

LC5000	Neo M14 Downlight Module, 60°, Phase Dim, 3000K, 1441lm
LC5000D	Neo M14 Downlight Module, 60°, DALI, 3000K, 1441lm
LC5057	Neo M14 Downlight Module, 60°, Phase Dim, 4000K, 1587lm
LC5048	Neo M14 Downlight Module, 22°, Phase Dim, 3000K, 1441lm
LC5057D	Neo M14 Downlight Module, 60°, DALI, 4000K, 1587lm
LC5018	Neo M14 Downlight Module, 36°, Phase Dim, 3000K, 1441lm