



LM-79 Test Report

Testing Method:	IES Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products
Relevant Standards:	IES LM-79-08
Test Date and Time:	17/04/2023 1:59:11 PM
Test Location:	Techlume Australia - East Goderich Street Deloraine, TAS 7304
Operator:	Johnny Elmer
Measurement Number:	VFR-230417-0055-MS
Measurement Method:	Far Field, Type C Horizontal
Measurement Distance:	453.3 cm

Equipment Used

System Name:	LabSpion Goniometer
Sensor Name / Model:	Viso LabSensor Model2 / Freedom VIS (Custom Viso)
Spectrometer Range:	360 nm – 830 nm
Calibration Date:	7/12/2022
Flicker Meter Type:	Viso Systems LabFlicker
Manufacturer:	Viso Systems, Denmark

Test Conditions

Ambient Temperature:	25 °C ± 1 °C
----------------------	--------------

Remarks

The results stated in this report represent the tested sample only. All photometric and colourimetric data has been measured in compliance with IES LM-79-08 standards.



Product Overview

Product Description:


LAWSON MK-II 150W Surface Mount Canopy Light, White, 4000K, 382mm x 382mm, Non-Dim

Item Number:

LC2855

Manufacturer:

Decrolux Lighting Pty Ltd

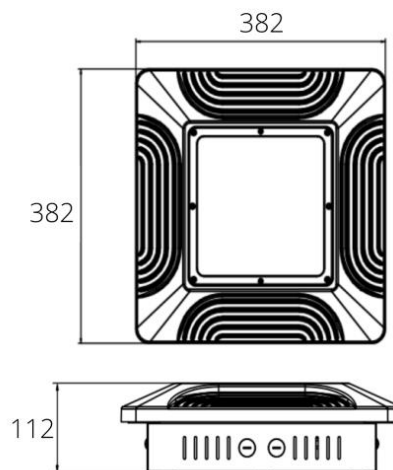

Photometric Measurements

Total Luminous Flux	Luminous Efficacy	Luminous Intensity
23203 lm	157 Lumen/watt	8427 cd

Correlated Colour Temperature, Target	Correlated Colour Temperature, Measured	Colour Rendering Index (CRI)
4000 K	4032 K	Ra 81.3


Electrical Measurements

Input Voltage	Input Current	Input Power	Input Voltage Frequency
240 VAC	0.626 A	147.7 W	60 Hz


Power Factor	Stabilisation Time	Stabilisation Variation	Hours Operated Prior to Test
0.98	Lamp stabilized in 5 min 0 sec	+0.1%	0 hours



Spectral Power Distribution (SPD)

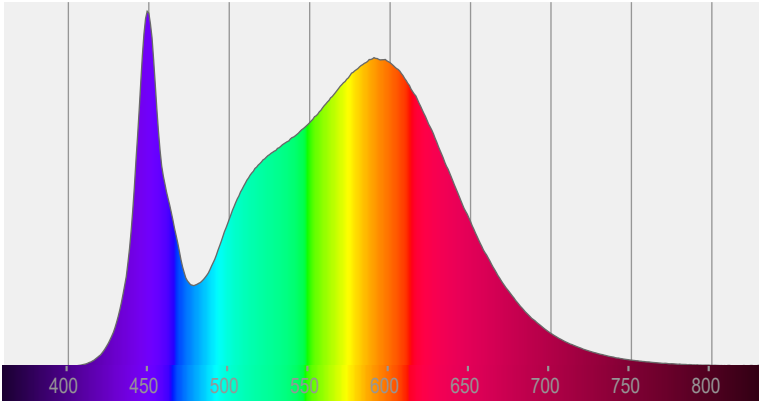

Input Power Curve

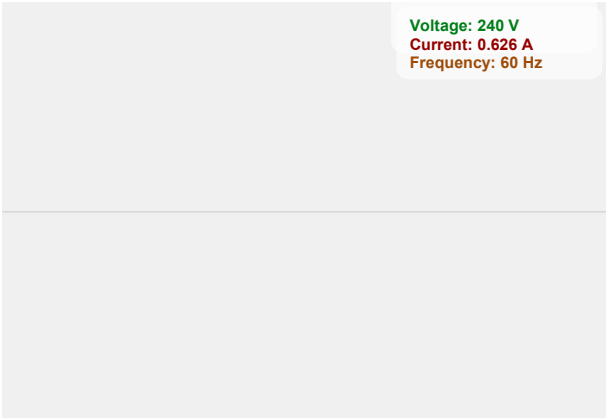


Flicker Details


Flicker Sample Rate	Flicker Percentage	Flicker Frequency	Flicker Index
20000 sample/s	0.11%	119.76 Hz	0

Flicker SVM Value	Flicker PstLM Value	Measurement Time (PstLM)	Measurement Time (all other indices)
0	0.01	180 s	1.2 s

IEEE 1789 Frequency/Modulation Plot

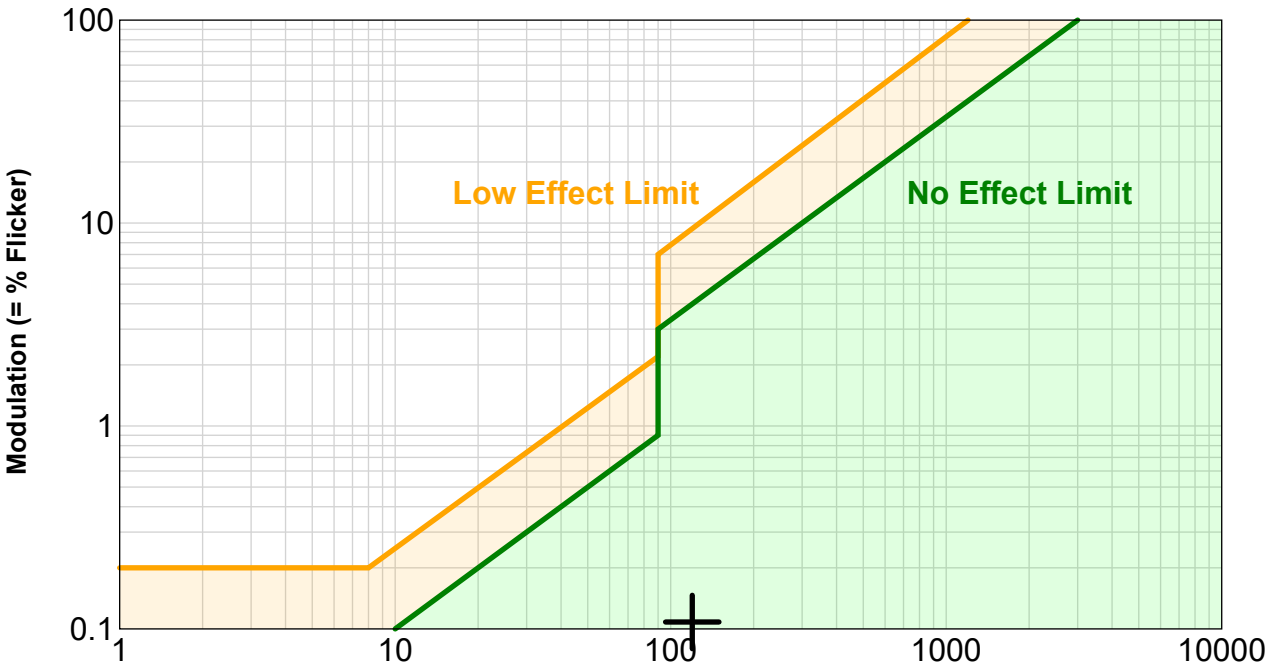

Angular Distribution – 0° / 90° Plane

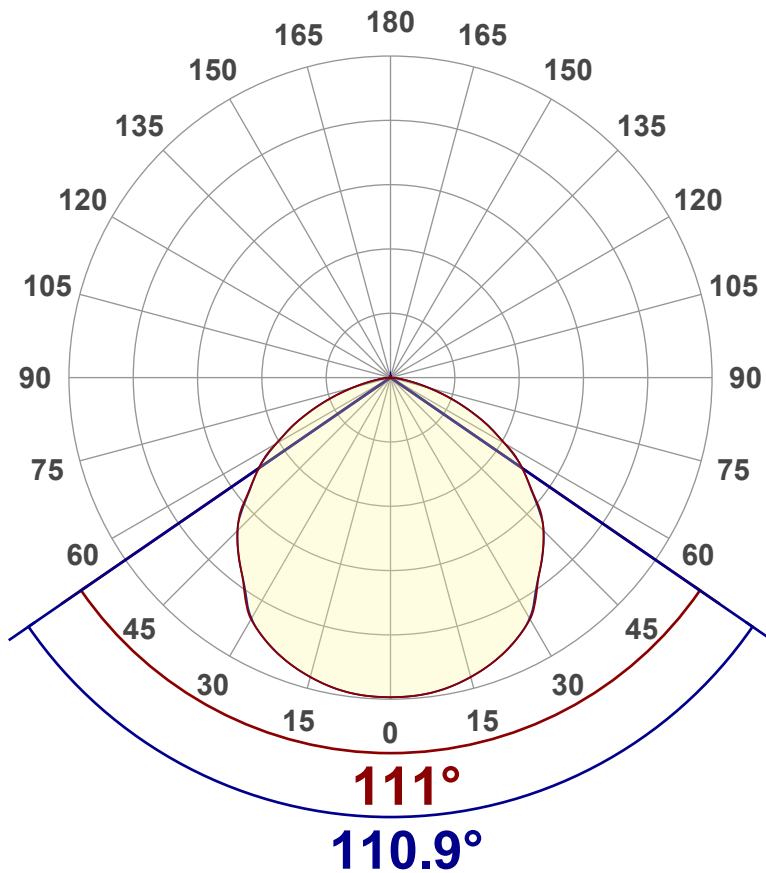

Main Values

Total Lumen Output	23203 lm
Lumen Up%	0.56%
Lumen Down%	99.44%
Peak Intensity	8427 cd
Beam Angle (90%)	110.9°

Cut-off Angle

Average 2.5%	166°
--------------	------

Field Angle


Average 10%	152.8°
-------------	--------

Intensity Ratio

In 120° Cone	82.6%
In 90° Cone	56.7%

C000-C180

C090-C270

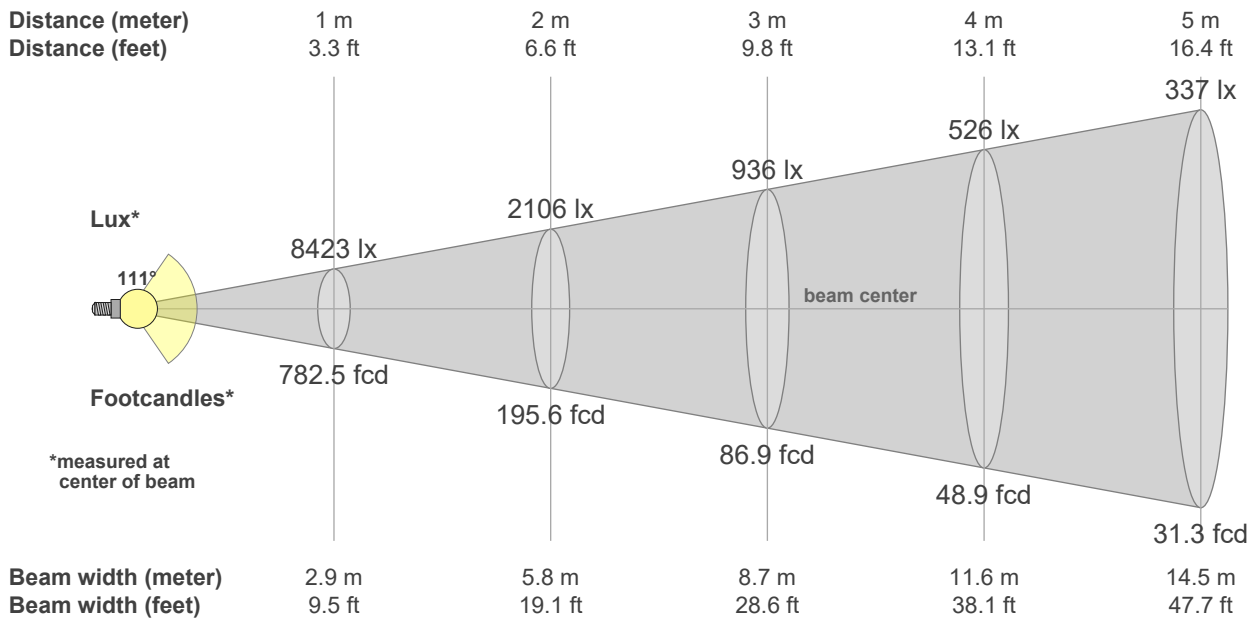

Beam intensities from 1 – 20m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
8423	2106	936	526	337	234	172	132	104	84	70	58	50	43	37	33	29	26	23	21	lux
782.5	195.	86.9	48.9	31.3	21.7	16	12.2	9.7	7.8	6.5	5.4	4.6	4	3.5	3.1	2.7	2.4	2.2	2	fc




Colour Details

Colour Rendering Index (CRI)	Colour Rendering Index R9 Value	Colour Rendering TM30-18
Ra 81.3	R9 = -1.6	R _f 83.2, R _g 95.1

Colour Quality Scale	Correlated Colour Temperature, Target	Correlated Colour Temperature, Measured
CQS = 81.0	CCT = 4000 K	CCT = 4032 K


MacAdam Steps	Colour Coordinates CIE 1931	Colour Deviation from BBL
SDCM = 1.5	(x;y) = (0.381;0.377)	Duv = 0.0018

Colour Rendering Index per reference colour (CIE 1995)

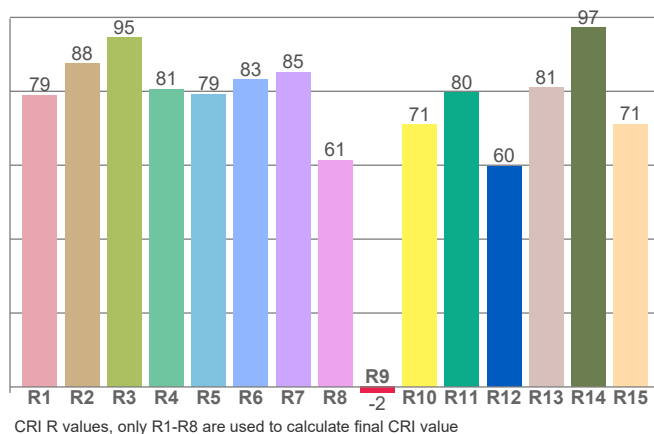


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
78.9	87.5	94.5	80.6	79.2	83.1	85.1	61.3	-1.6	71.0	79.7	59.7	81.0	97.2	71.2

TM30-18 R_f-values per hue bin

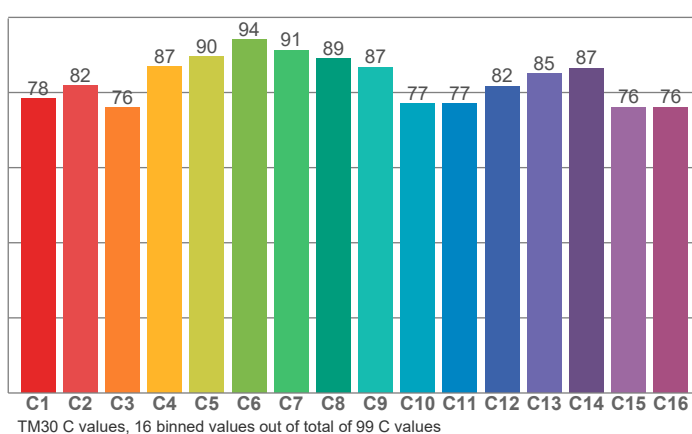


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.4	81.7	76.0	86.9	89.6	94.0	91.3	88.9	86.8	77.1	77.1	81.7	85.0	86.5	76.1	76.1


CIE 1931

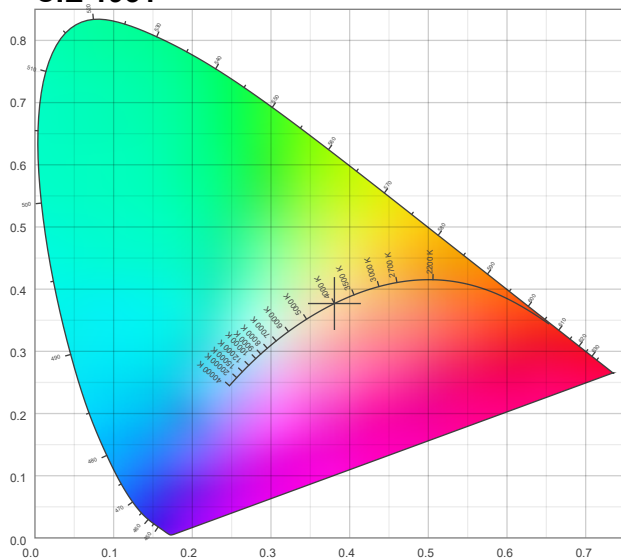

CIE 1931 – Zoomed

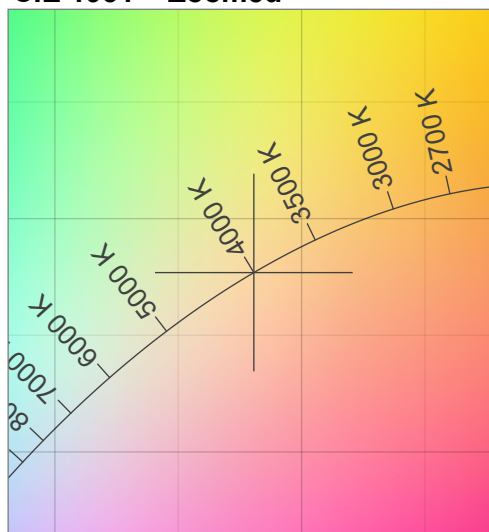


Iso-intensity Diagram (Iso-Candela)

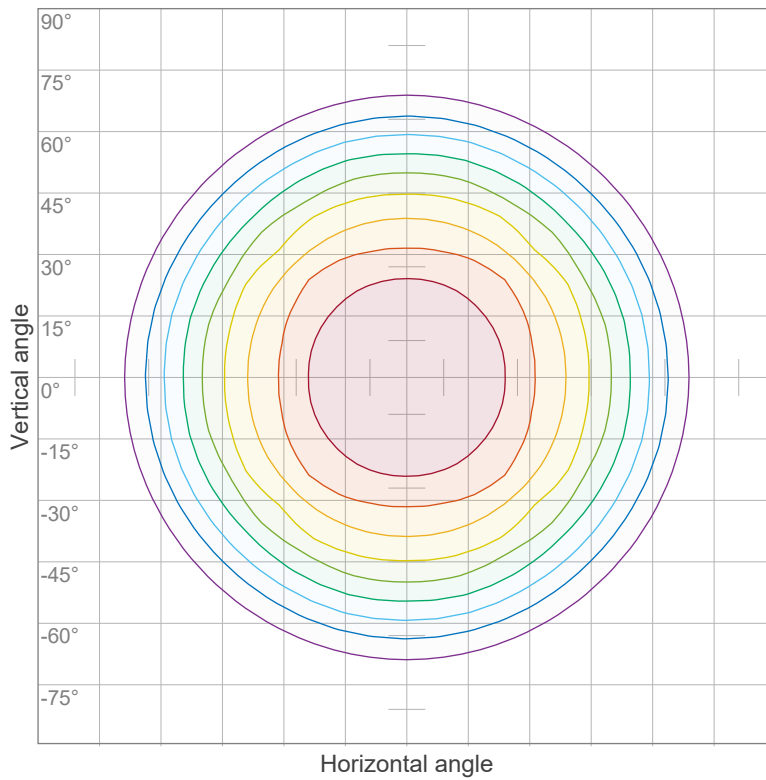

90 %	7584.1 cd
80 %	6741.4 cd
70 %	5898.8 cd
60 %	5056.1 cd
50 %	4213.4 cd
40 %	3370.7 cd
30 %	2528.0 cd
20 %	1685.4 cd
10 %	842.7 cd

Peak intensity: 8426.8 cd
Number of c-planes: 24

Iso-illuminance Diagram (Iso-lux)

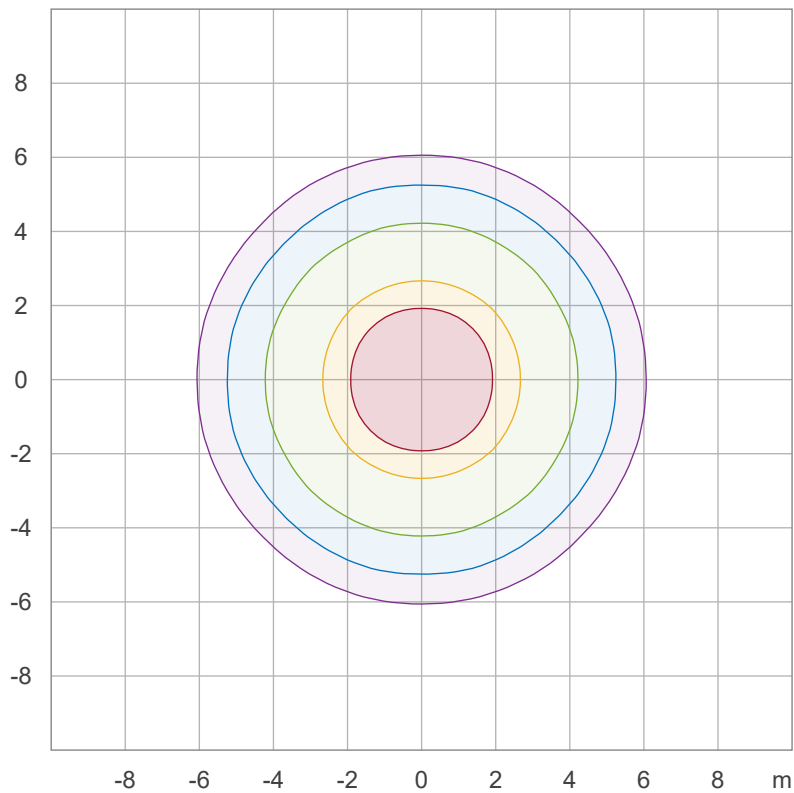

50.0 %	467.9 lx
30.0 %	280.8 lx
10.0 %	93.6 lx
5.0 %	46.8 lx
3.0 %	28.1 lx

Peak illuminance: 935.9 lx
Mounting height: 3.0 m
Number of c-planes: 24



